



**Microwave Filter Company, Inc.**

**Channel 8Y`Yh]cb: ]hYf**

**Application:**

Deletes an entire QAM channel for the purpose of reinserting alternate programming (e.g. - Instructional, Security Camera, etc.).





**R17700 Rack Mount**

**Product Features:**

- Utilizes High "Q" Components for Optimum Performance
- Preserves Adjacent QAM or Analog Channels
- Operating Bandwidth: 5 MHz to 1 GHz
- Available in Plate Mount or Rack Mount Configurations
- Multi-Channel Configurations Available Upon Request

**Specifications:**

- Channel Availability: 2 - 135
- Channel Rejection: 40 dB (Min.)
- Adjacent QAM Channel Loss: 3 dB (Typ.); 4dB (Max.)
- Adjacent QAM Channel Delay Variation: 400 nS (Max.)
- 75 ohms / F-Female Connectors

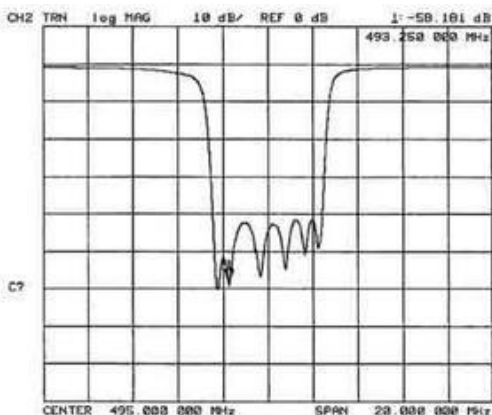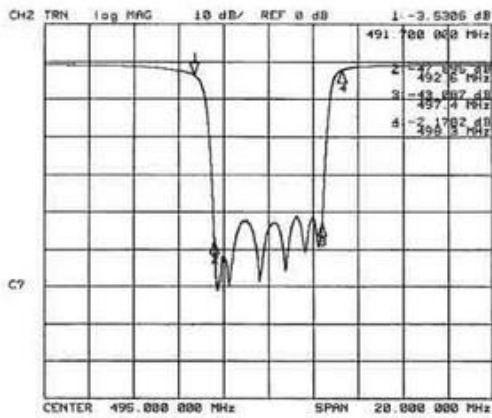

Ordering Information: 17700-(channel #) - Plate Mount (For Wall or Table Installation)

R17700-(Channel #) - Rack Mount