



HDE-CHV-QAM-IP


Single Channel HD Encoder

1xComponent / HDMI / VGA / Composite ▶ 1xQAM / 1xIP

HDE-CHV-QAM/IP (MPEG-2 HD Encoder – 1xComponent/HDMI/VGA/Composite – 1xQAM + 1xIP) accepts one (1) high-definition (HD) program from any of the following inputs: 1xComponent, 1xHDMI (unencrypted), 1xVGA, and 1xComposite. MPEG-2 encoded outputs are available in 1xQAM and 1xIP (100/1000Base-T Ethernet). The QAM RF output is frequency agile over the entire CATV frequency range of 5-1002 MHz (channels T7 to T14, 2 to 158) with an output level of +40 dBmV.

The encoder supports Dolby® Digital audio encoding and Closed Captioning (EIA-608). Comprehensive remote monitoring and control is accomplished using any standard Web browser via a front-panel 100/1000 Ethernet connection. A rear-panel VGA output port is available for loop-through applications.

1xComponent/HDMI/VGA/Composite

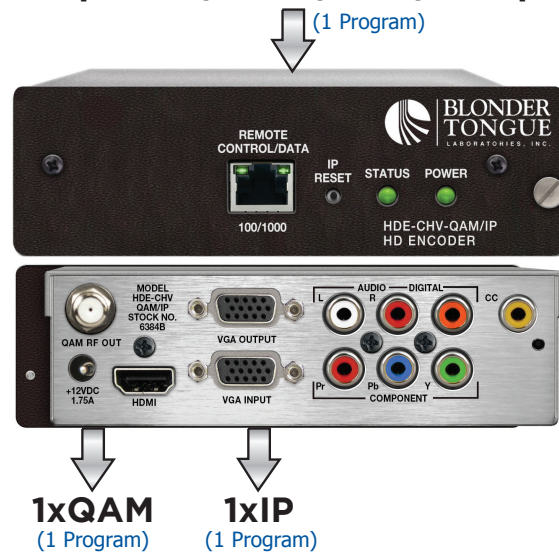

MPEG-2 HD Encoding
DOLBY® Digital Audio Encoding

Features

- Accepts one (1) program from any of the following inputs: 1xComponent, 1xHDMI (unencrypted), 1xVGA, and 1xComposite
- Simultaneously delivers 1xQAM and 1xIP outputs
- Provides +40 dBmV QAM RF output level
- Wide agile channel output coverage - Sub Channels (T7 to T14) through Channel 158
- Provides comprehensive GUI-based monitoring and control via standard Web browsers
- Compact design permits installation of up to 3 Encoder modules in 1RU
- Supports Real-time Dolby® Digital audio encoding
- Supports user-defined PSIP configuration
- Supports Closed Captioning EIA-608

Ordering Information

Model	Stock #	Description
HDE-CHV-QAM/IP	6384B	MPEG-2 HD Encoder; 1xComponent/HDMI/VGA/Composite inputs; 1xQAM + 1xIP outputs
HDE-3MCH	6389	1RU Rack mount chassis; holds 3 HDE-CHV-QAM/IP modules

HDE-CHV-QAM-IP

Single Channel HD Encoder

1xComponent / HDMI / VGA / Composite ▶ 1xQAM / 1xIP

Specifications

Input

Component	Connectors: 3x RCA for Video (Y, Pb, Pr) Video Resolution: 480i, 720p, & 1080i Video Aspect Ratio: 4:3 & 16:9 Audio: 2x RCA for Analog Audio (L, R) 1x RCA for Digital Audio (PCM)
HDMI	Connector: 1x HDMI Video Resolution: 480i, 720p, & 1080i HDCP Encryption: Not supported Audio: Embedded PCM & pass-through Dolby® Digital only
VGA	Connectors: 2x Female VGA (Input + Loop-through Output) Video Resolution: 640x480 @ 60 fps 800x600 @ 60 fps 1024x768 @ 60 fps Audio: 2x RCA for Analog Audio (L, R) 1x RCA for Digital Audio (PCM)
Composite	Connectors: 1x RCA for Video (Y) Video Resolution: 480i Audio: 2x RCA for Analog Audio (L, R) 1x RCA for Digital Audio (PCM)

Output

QAM	Connector: 1x "F" Female (Rear-panel) Modulation: QAM 16, 32, 64, 128, and 256 Standards: ITU-T J.83; Annex A and B DVB Symbol Rate: Variable; up to 7 MSymbol/sec (MBaud) Frequency Range: 5 to 1002 MHz Tuning: CATV Channel Selectable (T7 to T14, 2 to 158) 6 MHz Channels' Bandwidth: 6 MHz RF Level: +40 dBmV ±1 dB RF Level Adjustment: +35 to +42 dBmV, 1 dB increment Frequency Tolerance: ± 0.5 kHz @ 77 °F (25 °C) Frequency Stability: ± 5 kHz over 32 to 122 °F (0 to 50 °C) Amplitude Flatness: ± 0.25 dB (over 6 MHz channel) Phase Noise: -98 dBc (@ 10 kHz) Spurious: -60 dBc Broadband Noise: -70 dBc (@ +40 dBmV output level, 5.5 MHz bandwidth) Impedance: 75 Ω Spectral Inversion: Auto Recognition Carrier Suppression: 45 dB Return Loss: 14 dB typical Signal-to-Noise Ratio (SNR): 40 dB typical MER: 40 dB typical I/Q Phase Error: Less than 1 degree I/Q Amplitude Imbalance: Less than 1%
IP	Connector: 1x RJ45 (Front-panel) Standard: 100/1000Base-T Ethernet UDP/RTP: Supported (user-selectable)

Encoding Profile	
Video	Output Format: MPEG-2 HD MP@ML; ISO 13818-2 Chroma: 4:2:0 Resolution: 480i, 720p, & 1080i Frame rate: 29.97 fps (480i); 29.97 fps (1080i); 59.97 fps (720p) Aspect Ratio: 4:3 & 16:9 GOP Structure: I & P frames (user-selectable) Transport Rate: Variable (user-selectable) Video Bit Rate: Variable (user-selectable) Video Pre-filter: Variable (user-selectable) Color Space: YCbCr and RGB
Audio	Output Format: Dolby® Digital Sampling rate: 48 kHz Bit rate: Variable; 96 - 448 Kbps (user-selectable)
Closed Captioning	Component: EIA- 608; 1x RCA (CC) HDMI: EIA- 608; 1x RCA (CC) VGA: EIA- 608; 1x RCA (CC) Composite: EIA- 608

General

Dimensions (W x D x H):	5.65 x 14.10 x 1.72 inches (143.5 x 358.1 x 43.7 mm)
Power:	External Power Supply (Input 115-230VAC / Output 12VDC @ 3 Amp)
Power Dissipation:	16 W
Weight (one module):	1.75 lbs (0.795 kg)
Operating Temperature:	32 to 122 °F (0 to 50 °C)
Storage Temperature:	-13 to 158 °F (-25 to 70 °C)
Operating Humidity:	0 to 95% RH @ 35 °C max, non-condensing
Storage Humidity:	0 to 95% RH @ 35 °C max, non-condensing

Alarms/Monitoring/Control

Local Monitoring:	1x Power LED 1x Status LED
Local Control:	1x IP Reset button
Remote Monitoring/Control:	GUI-based menu via standard Web browser (1x RJ45 front-panel connector; 100/1000Base-T, also used for IP output)