


L D8 'GYf]Yg' Dck Yf '8]j]XYfg

Power Dividers are used to provide input signals to several receivers from on antenna/LNB combination

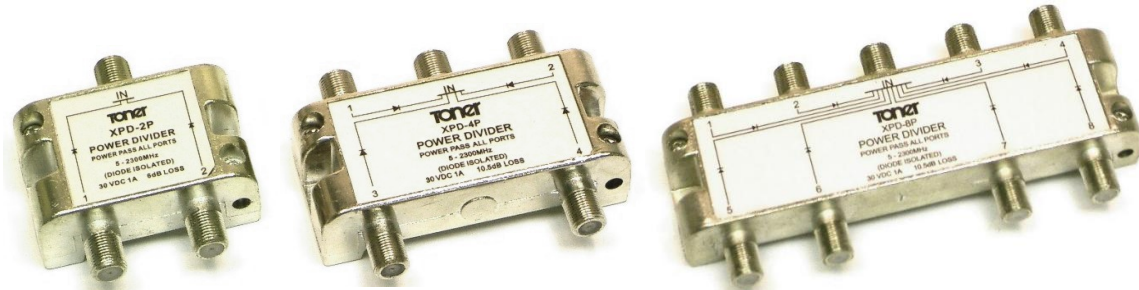

Frequency range	5 MHz - 2300 MHz
Connectors	F Type
Impedance	75 Ohms
Power Passing	All Ports Diode Isolated 30 Vdc 1A

Specifications

Power Dividers		2-Way	4-way	8-Way
Model Number		XPD-2P	XPD-4P	XPD-8P
INSERTION LOSS (In-Out) (Max) dB	5-40 MHz	< 4.2	< 9	< 15
	40-470 MHz	< 4.5	< 8	< 14
	470-860 MHz	< 4.5	< 8.5	< 14
	950-1750 MHz	< 6.0	< 10.5	< 15
	1750-2300 MHz	< 6.5	< 11	< 18
ISOLATION LOSS (Out-Out) (Min) dB	5-40 MHz	> 12-13	> 16-23	> 20
	40-470 MHz	> 20	> 20	> 20
	470-860 MHz	> 20	> 20	> 20
	950-1750 MHz	> 20	> 20	> 20
	1750-2300 MHz	> 18	> 16	> 18
RETURN LOSS In (min) dB	5-40 MHz	> 13-16	> 12	> 9-10
	40-2300 MHz	> 16	> 10	> 10
RETURN LOSS Out (min) dB	5-40 MHz	> 9-18	> 12-18	> 6-10
	40-2300 MHz	> 14	> 8	> 8
Connectors		75 Ohm "F" Type		