toner
cable equipment, inc.
www.tonercable.com

Eagle Brick Wall Deletion
EBWD

The EBWD series of Channel Deletion filters attenuate the entire channel from video to audio while preserving the adjacent channel carriers. This allows the reinsertion of a new channel or data signal without interference from the original signal.

Application
Removal of a selected channel or frequency to allow the reinsertion of a locally originated signal.
Commercial Accounts, Schools, Hospitals, Hotels, Homeowners

Features
Exceptional Low Insertion Loss
Extended High Frequency
Temperature / Frequency Stable
Passes Adjacent Channels
Rack Mount or Wall Mount Options
Connectors “F” Type
Power Passing Available

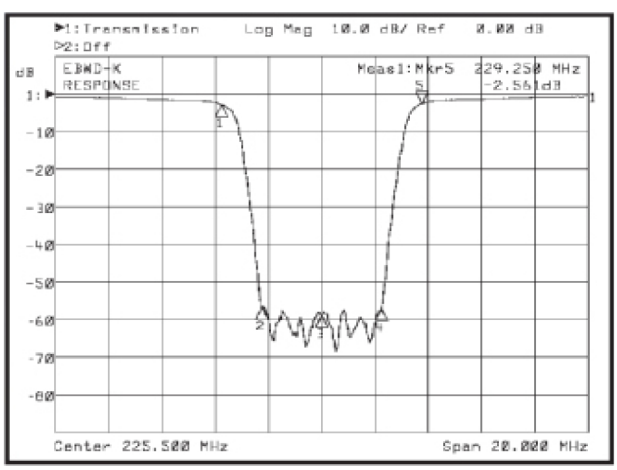

Specifications subject to change without notice.

Specifications
CHANNELS: 2 through 125
PASSBAND: 5 MHz - 750 MHz (ch 2,3)
5 MHz - 1 GHz (ch 4-125)
** 1 GHz Ext available for channels 2 and 3*
CHANNEL REJECTION: -55 dB typ.
ADJACENT CARRIER LOSS: -3.0 dB typ.
INSERTION LOSS: -1 dB typ.
TEMPERATURE RANGE: 32° F to +140° F
IMPEDANCE: 75 Ohms

Multiple Channel Deletions Available

• EBWD Wall Mount

• EBWD Rack Mount

Ordering Information
EBWD-XX or EBWD-XX-R or -W,
XX=CHANNEL, R=RACK MOUNT, W=WALL MOUNT

969 Horsham Road • Horsham, Pennsylvania 19044 USA • Phone: 215-675-2053 • info@tonercable.com