




OTS-ODLS

18 GHz, 40 us max Internal Fiber Delay Line System

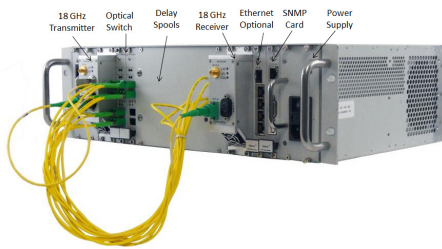

The Optiva OTS-ODLS, 18 GHz Internal Fiber Delay Line System is designed for use with Optiva OTS-2 18 GHz transmitter, receiver, optical switches, and EDFA's. The optical switches allow for up to four separate delays to be used with a maximum delay time of 40 μ s. The system delivers unmatched performance for radar testing, signal processing, phased array antennas and phase noise testing with greater flexibility than traditional coax or waveguide solutions.

EMCORE's fiber optic delay lines provide bandwidth that is essentially independent of fiber length, losses or delays, and triple transit signals that are immeasurable. In addition to enhanced electrical performance, the delay lines provide several mechanical advantages. EMCORE's technology takes advantage of the rigid yet flexible properties of fiber optic cable to provide repeatable enhanced phase and group delay characteristics.

The Optiva OTS-ODLS provides convenient RF input/outputs to connect to the OTS-2 RF transmitter and receiver. Internally, the RF signal is converted to an optical signal and transmitted over a fiber optic link to the receiver and provides the required signal delay time. Delay length and link performance requirements can be tailored over a range of performance levels to meet specific requirements. The Optiva OTS-ODLS system allows for a long delay in a relatively compact package with the superior temperature stability of fiber.

EMCORE's Optiva OTS-ODLS 18 GHz internal fiber delay line system can be supplied as a complete solution with all modules mounted in a 19" Optiva rack-mount enclosure utilizing standard AC power. The Optiva OTS-ODLS family of internal fiber delay lines also includes 22 GHz and 40 GHz frequency options and external Optiva fiber delay line systems for greater delay lengths are available.

System Design

The Optiva platform includes a wide range fiber **optiva** PLATFORM optical transport solutions for satellite and microwave communications applications including transparent inter- and intra-facility links, video transport, antenna remoting, radar system testing, phased array antennas, signal processing, electronic warfare systems and other high-dynamic-range applications.

Optiva is a completely modular, hot-swappable platform with a variety of rack-mount or compact tabletop, or wall-mountable enclosures are available. The 3 RU 19" rack-mount, fan-cooled enclosure (Model OT-CC-16F) for the OTS-ODLS internal fiber delay line system can support up to 16 insert cards and utilizes two dual-redundant, hot-swappable, 200 watt power supplies.

Applications

- Radar System Testing
- Phased Array Antennas
- Signal Processing
- Electronic Warfare (EW) Systems

Features


- 40 μ sec Delays Max
- Switching Option Available
- Smaller Size and Less Weight - Conserves Rack Space
- 0.05 - 18 GHz Bandwidth
- Flat Phase Response
- Minimal Triple-Transit Echoes
- Low Link Loss Options
- Low Temperature Sensitivity
- Manually and/or Computer Controlled

OTS-ODLS

18 GHz, 40 us max Internal Fiber Delay Line System

Specifications

Typical RF Characteristics/Standard Features measured with OTS-2 Tx and OTS-2 Rx


Parameter	Value	Unit	Comments
Frequency Range	0.05-18	GHz	
Delay Range	3 to ≤ 40	μ sec	
Delay Tolerance	$< +/-2$	%	
Phase Stability	$\Delta\phi \leq 2^\circ$ per 10 sec	--	Typical for 40 μ s DLS
RF Input Level	0 to 16	dBm	Typical
Deviation from Linear Phase	$\leq 10^\circ$	--	Typical (up to 18 GHz)
Amplitude Flatness	$\leq +/-3$	dB	 Typical
Amplitude Linearity	$\leq +/-1$	dB	
Gain (@ RF in = 0 dBm)*	≤ -10	dB	
Return Loss/VSWR	$R_L > 15$ $\leq 1.43:1$	dB	
Spur Level	≤ -60	dBc	
Input 1 dB Compression Point	$\geq +16$	dBm	
2nd Harmonic (@ RF _{in} = 0 dBm)	≤ -45	dBc	
Noise Figure	≤ 70	dB	
RF Connectors	SMA-F	--	

*0 dB gain is based upon a single 40 μ s delay spool and receiver with 35 dB post amplifier. Actual system gain will vary based upon system requirements.

Environmental Specifications

Parameter	Symbol	Min	Max	Units
Operating Temperature	T _{OP}	-10	50	°C
Operating Humidity, Maximum Non-Condensing	-	-	95	%
Operating Altitude, Above Sea Level	-	-	6000 1828	ft m
Storage Temperature	T _{STG}	-40	70	°C
Storage Humidity, Maximum Non-Condensing	-	-	95	%
Storage Altitude, Above Sea Level	-	-	50,000 15,240	ft m

Block Diagram - Four Delays System Option

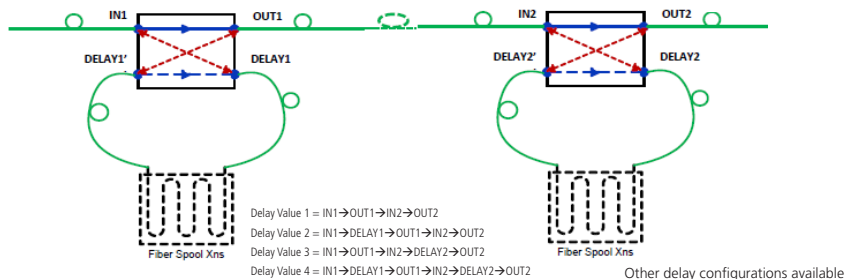

Order Information

OTS-ODLS-I-18-V/XX-Y-ZZ

- When ordering replace "V" with one of the Switching Options
- When ordering replace "XX" with one of the Optical Connector Options
- When ordering replace "Y" with one of the RF Output Options
- When ordering replace "ZZ" with one of the Gain Options
- Delay Time Options* must be defined by Customer

Switching Options (0 to 4) "V"	Optical Connector Options "XX"	RF Output Options "Y"	Link Gain RF Amplifier Options "ZZ"
Standard: 0 = no Switching	Standard: SA = SC / APC	1 = Fixed Output EDFA in Rx	00 = No RF Amp 01 = RF Amp
Optional: 1 = One Delay 2 = Two Delays 3 = Three Delays 4 = Four Delays	Optional: FA = FC / APC EA = E2000 / APC	2 = Variable Output No EDFA in Rx	

Delay Time Options* (50 ns to 40 μ s)

Standard:
1 Delay = XXXXXX
(XXXXXX) = 1000/100/10/1/1/01

Optional:
1st Delay = XXXXXX
(XXXXXX) = 1000/100/10/1/1/01
2nd Delay = XXXXXX
(XXXXXX) = 1000/100/10/1/1/01
3rd Delay = XXXXXX
(XXXXXX) = 1000/100/10/1/1/01
4th Delay = XXXXXX
(XXXXXX) = 1000/100/10/1/1/01