

## AM' U

### ' U AM Style Modular Patch Panel

FibreFab offers an innovative, robust, 3U sliding panel with a smoked plexi glass hinged front door. This panel has been designed to accept up to 9 MTP cassettes or LGX style assemblies.

With the ability to use a full array of adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional chassis which allow easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the array of adaptors the panel also offers multiple cable entry solutions, MTP trunk cables connected to 9 individual MTP cassettes with up to 24 fibres in each, loose tube cable to be spliced into standard splice cassettes to allow standard splicing or pre terminated solutions, making this panel one of the most flexible on the market.




#### Features/Benefits

- ▶ Up to 9 LGX components in 3U
- ▶ 19" and 23" Rack mountable
- ▶ Sliding tray for ease of installation
- ▶ Integrated spring loaded tray retainer
- ▶ Up to 9 x 24 fibre MTP cassettes
- ▶ Multiple adaptor options available
- ▶ Splicing option available.
- ▶ Side Patch cord exit
- ▶ Hinged front plexi glass door.
- ▶ Removable top cover
- ▶ Accepts loose tube, distribution cable and MTP trunk cable.
- ▶ ROHS, REACH SvHC.




#### Technical Drawings


Front View

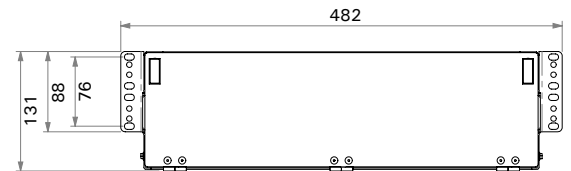


Top View

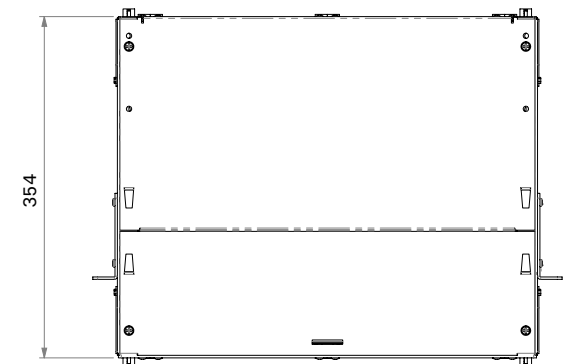

Side View

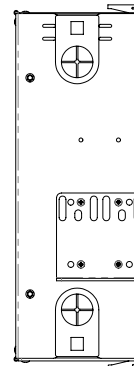

All dimensions in mm

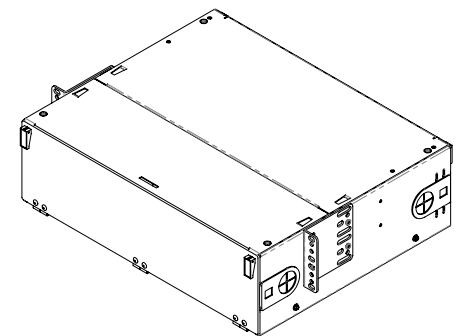

#### Applications

- ▶ Data centres, premise installations, telecommunication networks.
- ▶ Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- ▶ Data communication and telecommunication networks
- ▶ Indoor applications.

#### Technical Specification

3U Modular Patch Panel Chassis	
Height	3U (133.4mm)
Width	432mm
Depth	356mm
Net weight	8.0kg
Packaged weight	8.5kg
Packaged dimensions	510mm (W) x 450mm (L) x 210mm (H)
Suitable for Adaptor type	LGX / MTP Cassettes
Number of module positions	9
Material	Cold-rolled steel
Material thickness	1.2mm
Material finish	Powder coating
Colour	RAL 9004
Operating temperature	-40°C to +60°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC