

@cWUVY


G]a `]bY`K U``6cl

The FibreFab wall box system can be supplied unloaded ready for the installer to load with their choice of adaptors, or pre-loaded with adaptors and pigtails ready for installation. With the ability to use a full array of adaptor types, this wall box offers a flexible solution to the end user, enabling them to incorporate a multi functional wall mounted box which allows easy access during installation or rework with no disturbance of existing cable or fibres. In addition to the array of adaptors the box also offers multiple cable entry and exit solutions: up to 4 standard entry points for loose tube, tight buffered, preterminated, steel tape armoured cable and 2 slotted positions for patch cord exit.

- ▶ Up to 24 fibre
- ▶ Multiple adaptor options
- ▶ 24 adaptor positions
- ▶ ROHS, REACH, SvHC
- ▶ Lockable single door
- ▶ Internal bend radius protection included
- ▶ Internal applications
- ▶ For use in multi dwelling units or demarcation points



In the box

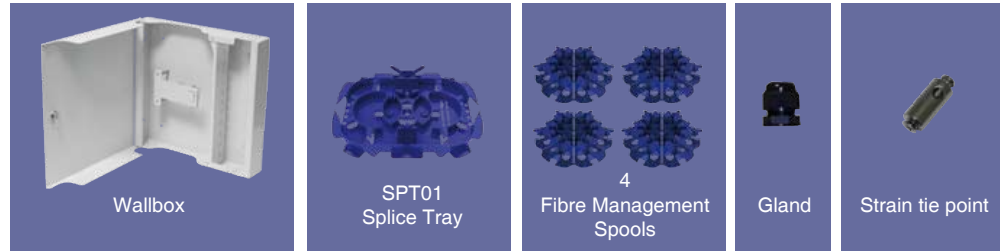

Technical Specification

<i>Slimline Wall Box</i>	
Height	288mm
Width	300mm
Depth	54mm
Net Weight	3.3 kg
Packaged Weight	3.5 kg
Package Dimensions	310mm x 300mm x 65mm
IP Rating	IP20
Suitable for adaptor type	SC Simplex, ST, FC, SC Duplex, LC, E2000
Number of doors	1
Cable entry 20mm	4
Material	Cold Rolled Steel
Material thickness	1.2mm
Material coating	Electrostatic Powder Coating
Colour	Grey (RAL7035)
Operating Temperature	-40°C to +60°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Technical Drawings

