











# Enclosure Options

## Locking Front Doors


Offered in lightly smoked plexi, 25% open area perf, 64% open area perf, plexi-vented and solid configurations. Beveled corners provide a stylish modern appearance while hinging either left or right. Black textured powder coat finish. Includes keylock.




Front Door Part # (Fits MRK, VRK, VMRK, WRK, ERK, DWR, SR Series)					
Solid	Plexi	25% Open Area Perf	64% Open Area Perf	Plexi Vented	# of Rackspace
FD-54	PFD-54	VFD-54	-	-	54
FD-46	PFD-46	VFD-46	LVFD-46	-	46
FD-45	PFD-45	VFD-45	LVFD-45	-	45
FD-44	PFD-44	VFD-44	LVFD-44	PVFD-44	44
FD-42	PFD-42	VFD-42	LVFD-42	-	42
FD-40	PFD-40	VFD-40	LVFD-40	-	40
FD-37	PFD-37	VFD-37	LVFD-37	-	37 
FD-35	PFD-35	VFD-35	LVFD-35	-	35 
FD-27	PFD-27	VFD-27	-	-	27 
FD-24	PFD-24	VFD-24	LVFD-24	-	24 
FD-21	PFD-21	VFD-21	LVFD-21	-	21 
FD-18	PFD-18	VFD-18	LVFD-18	-	18 
FD-16	PFD-16	VFD-16	LVFD-16	-	16 
FD-12	PFD-12	VFD-12	LVFD-12	-	12 
FD-10	PFD-10	VFD-10	LVFD-10	-	10 
FD-8	PFD-8	VFD-8	-	-	8 



Front Door Part # (Fits DRK Series)			
25% Open Area	Plexi	Plexi Vented	# of Rackspace
DVFD-44	DPFD-44	DPVFD-44	44

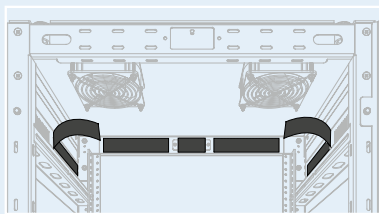

vent blockers magnetized on one side only to eliminate stray magnetic fields

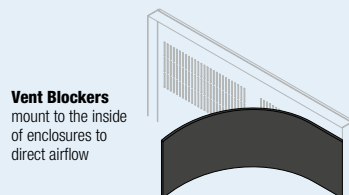

**Vent Blockers** mount to the inside of enclosures to direct airflow

## Vent Blockers

VBK Series Vent Blockers are used to promote active thermal management. Designed to prevent the re-circulation of hot air between top-mount fans and nearby vent openings, Vent Blockers should be placed over the enclosure's vents located on the upper front of the enclosure, upper sides, and upper rear door (depending on enclosure). This will ensure that heated enclosure air will be forced out through the top-mounted exhaust fans instead of re-circulating, keeping equipment cool.

Part #	Used On	Part #	Used On
VBK-W27-W32	WRK-xx27 & WRK-xx-32	VBK-SD22	SR-40-22, DWR-xx-22
VBK-WSA27	WRK-xxSA-27	VBK-S28	SR-xx-28
VBK-WSA32	WRK-xxSA-32, WR-xx-32*	VBK-S32	SR-xx-32, DWR-xx-32
VBK-E20	ERK-xx20, DWR-xx-26	VBK-S42	WR-xx-42*
VBK-E25	ERK-xx25	VBK-V	VRK Series
VBK-SCRK27	SCRK Series	VBK-DRK	DRK Series
VBK-D17	DWR-xx-17		

\* When WR is not flush against a wall, block the rear opening with the optional rear access panel, model #WR-RAP-xx

## Enclosure Options

### Thermal Management Kits for Rear Door

Middle Atlantic Products standard solid rear doors on WRK, MRK and ERK Series enclosures are configurable for achieving optimal active or passive thermal management. Fan, vent and filter kits are available to install after laser knockouts are removed. Fan and vent kits now available for solid split rear doors.



KO-AWFP2




KO-VT3



KO-FILTER3

WRK, MRK, ERK Standard Solid Rear Doors	
Part #	Description
KO-AWFP2	fan kit with two fans, 190 CFM
KO-VT3	vent panel kit
KO-FILTER3	filter kit
KO-WSB3	blank panel kit

Solid Split Rear Doors	
Part #	Description
KO-CRD-FAN	fan kit with two fans, 190 CFM and two vents
KO-CRD-VT	filter kit

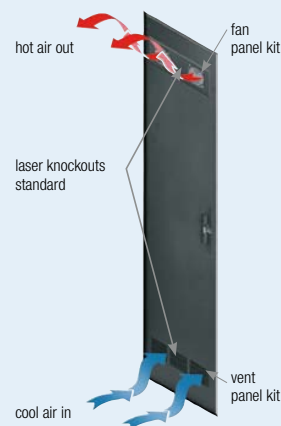

### Optional Doors

Substitute a vented rear door for a solid rear door in selected sizes. Black textured powder coat finish. See web for racks available 'less rear door' (LRD). Fully vented rear doors have 64% open area. Split rear doors with 3 point latch offer 79% open area and require less floor space when accessing rear equipment connections.



Rear Door Part # (Fits WMRK, MRK, VRK, VMRK, WRK Series)				Fits ERK Only	
Top & Bottom Slot Vented	79% Open Area Split Perf	64% Open Area Perf	Solid Split	Top & Bottom Slot Vented	# of Rackspace
-	MW-CLVRD-45	-	MW-CRD-45	-	45
MW-VRD-44	MW-CLVRD-44	MW-LVRD-44	MW-CRD-44	ERK-VRD-44	44
-	MW-CLVRD-42	-	MW-CRD-42	-	42
-	-	MW-LVRD-40	-	ERK-VRD-40	40
-	-	-	-	ERK-VRD-35	35
-	-	-	-	ERK-VRD-27	27
-	MW-CLVRD-24	-	MW-CRD-24	-	24
-	-	-	-	ERK-VRD-21	21
-	-	-	-	ERK-VRD-18	18



Rear Door Part # (Fits DRK Series)				
Slot Vents Fully Vented	Top & Bottom Slot Vented	64% Open Area Perf	79% Open Area Split Perf	Solid Split
DFVRD-44	DVRD-44	DSVRD-44	DCLVRD-44	DCRD-44