



OTR-4U-C

4U Chassis For OTR 300 Series

OTR-4U-C



Features

- Holds up to 16 single or 8 double slot OTR-30x cards
- 110 to 240 VAC redundant power supplies
- Hot-swappable OTR-30x cards
- Up to 64 channels of 3G-SDI in 4U space (with OTR-304)
- Quiet fans for enhanced cooling of installed cards

The OTR-4U-C is a cost effective, 16 slot, 4U chassis for mounting any single or double slot OTR-30x transmitter or receiver in a equipment rack. Clean up the installation by racking up to 16 single or 8 double slot OTR-30x transmitters or receivers or mix and match in the same chassis. The unit comes standard with redundant 110-240 VAC power supplies and the OTR-30x insert cards are hot-swappable. The OTR-4U-C also has quiet fans for proper air flow over the OTR-30x insert cards.

OTR-4U-C

4U Chassis For OTR 300 Series

Models


Model	Description
OTR-4U-C	19" Chassis, 4U with 16 slots for OTR-30x cards, Redundant 110-240 VAC power supplies

Specifications

Mechanical Specification	
Enclosure type	4U Rack mount
Dimensions (W x H x D)	19" x 7" x 10"
Weight	20 lbs
Power Specification	
Power Supply	110-240VAC
Power Consumption	96 Watts (max fully loaded)
Environmental Specification	
Operating Temperature	0 to +50 C
Relative Humidity	0 to 90%, non-condensing
Storage Temperature	-20 to +85 C

OTR INSERT
CARD SLOTS

REDUNDANT AC POWER SUPPLIES

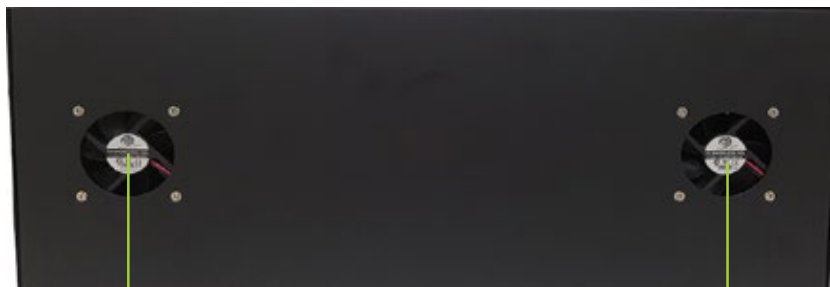

FANS