


# ASI

## 4-Channel ASI I/O Module

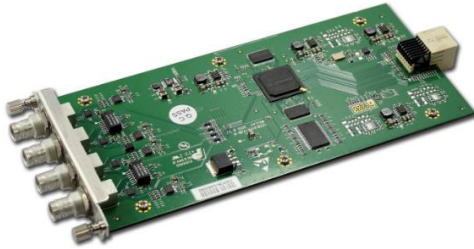

### OVERVIEW

The 'ASI' module has 4 ASI ports which can be configured to be inputs or outputs.

### KEY FEATURES

- 4 ASI ports
- Configurable to be input or output ports
- Platform-based Modular Design

### ORDERING INFORMATION

Model	Description
WAV-DMP-SMP-ASI	4-CH DMP-SMP ASI I/O Module
WAV-SMP100-CHASSIS	Chassis 1RU, embedded MUX and IP/ASI, 3x slots
WAV-DMP900-CHASSIS	Chassis 1RU, embedded MUX, 6x slots, Dual PSU, hot-swappable

### SPECIFICATIONS

#### ASI

Interface: 4 x BNC, 75Ω  
 Modes: 4 Inputs  
 4 Outputs  
 2 Inputs/2 Outputs  
 Maximum Bitrate: 100Mbps  
 Packet Type: 188/204 Bytes Inputs,  
 188 Bytes Outputs  
 Input Mode: Spread and Burst  
 Output Mode: Spread

#### Platform

Power Consumption: Maximum 5W