



": "5 XUdhYfg/ '5 WYggcf]Yg




- F-81**  
**Female F Type Splice Connector (Barrel)**
- 7/16" hex
  - Bright Acid Tin Plating



- F-81NW**  
**Female F Type Splice with Nut and Washer**
- For installation in Wall Plates or panels
  - 7/16" hex
  - Bright Acid Tin Plating



- NW-81**  
**Nut and Washer for F-81 or any Female F Connector**
- Plated Mild Steel
  - Machined 3/8-32 Threads



- F-71**  
**Male F Type Splice**
- 3/8-32 UNEF Threads
  - Bright Acid Tin Plating



- TLT-59**  
**Locking F Port Terminator**
- Machined Aluminum swivel body with internal 75 terminator
  - Uses Standard GTP tool




- F59-TMF**  
**Dual Male and Female F Terminator**
- Used to terminate both the Female F fitting and the Male (cable end) F Connector
- Solid Brass Body
  - Bright Acid Tin Plating
  - 3/8-32 UNEF Threads
  - Better than 80 dB isolation

- PF-59**  
**Push-On F Adapter**
- Female F Fitting to Male F Push-On Adapter
- Solid Brass Body
  - Bright Acid Tin Plating
  - Machined 3/8-32 UNEF Threads



": "5 XUdhYfg/ '5 WwYggcf]Yg

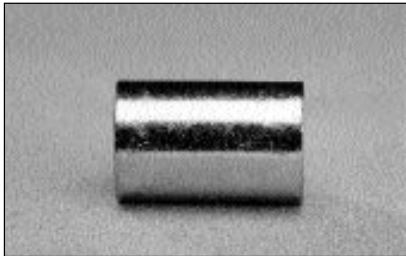


**SS-1D**

**Security Sleeve**

Prevents the Unauthorized Removal/Connection of F Connectors

- Die Cast Construction
- 1" Length
- Zinc Plated
- Uses Standard ST-1 Tool

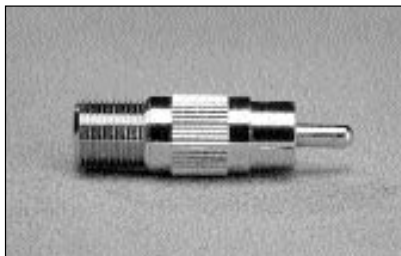

**FF-R**

**F Female to RCA Male Adapter**

- Solid Brass Body
- Machined 3/8-32 Threads
- Bright Acid Tin Plating



**VBC**

**Voltage Blocking Coupler**

- Blocks DC Voltage from Input to Output
- Female to Male F Fittings
- Solid Brass Body
- Bright Acid Tin Plating



**F59-T**

**75W F Port Male Terminator**

- Solid Brass Body
- Bright Acid Tin Plating
- Machined 3/8-32 UNEF Threads
- 1/4 Watt Resistor
- 20 dB Return Loss



**F59-TWR**

**Weather Resistant Terminator**

- Integral Rubber "O" Ring to Help Seal the F Port
- Solid Brass Body
- Bright Acid Tin Plating
- Machined 3/8-32 UNEF Threads
- 1/4 Watt Resistor
- 20 dB Return Loss



**F-90**

**Right Angle F Female to F Male Adapter**

- Die Cast Construction
- Machined 3/8-32 Threads
- Bright Acid Tin Plating

**BFA**

**BNC Male to F Female Adapter**

- Adapts 75W F to 75W BNC
- Solid Brass Body
- Bright Acid Tin Plating

