


<] \ 'DUgg:]HYf

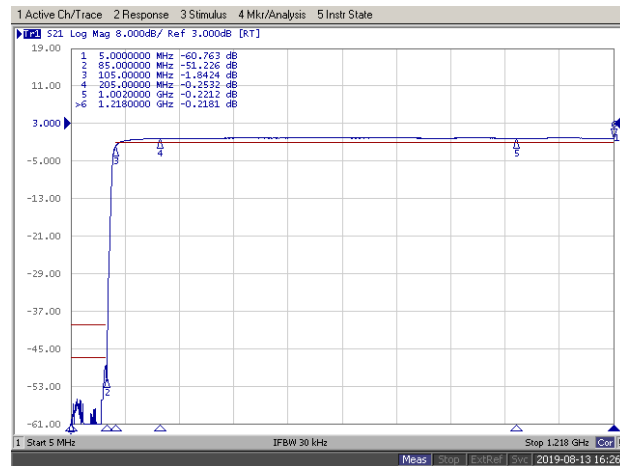

Features

- Support D CSIS 3.1.
- Nickel plated Brass housing for long lasting anti-corrosion.
- All ports 75 ohm withstand 40lb/inch torque.
- This unit is built in all SMD components for consistence performance.
- Digital high pass filters are designed for usage in restricted spaces for trouble-free installations.
- 6 V ring wave surge protection.
- Custom design is welcome.

Specifications

Part No.	HPF-105	
Frequency Range	5 - 1218 MH	
Pass Band	105 - 1218 MH	
Insertion Loss	105 - 205 MH	1.8 dB
	205 - 1218 MH	1.0 dB
Stop Band	5 - 85 MH	
Stop Band Re ection	50 dB	
Return Loss	105 - 1218MH	18 dB
Impedance	75 ohms	