


# LED-1907HDMTR

## 19" Rack-Mount LCD Monitor with Tuner

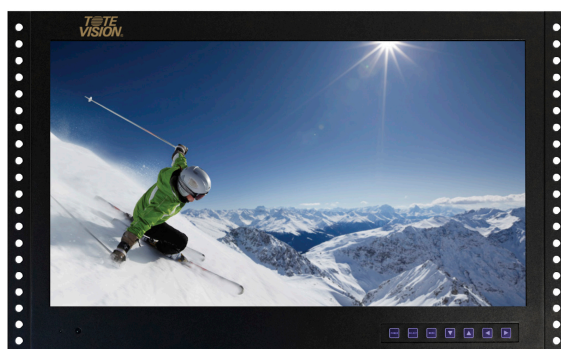

High-definition, rack-mountable, LCD monitor with TV tuner that is versatile and effective for any commercial video application.

### Benefits

- Displays HD signals (1080i/p)
- LED backlight provides brighter picture with less power
- 3D + 3D image processing with digital noise reduction
- Built-in ATSC / Clear QAM Tuner
- Durable Metal Housing
- Built-in speakers
- IR remote control

### Related Products

- LED-1907HDMTL: 19" Flush mount LCD monitor with tuner
- LED-1907HDMT: 19" Standalone / wall-mount LCD monitor with tuner
- LED-1906HDT: 19" LCD monitor / TV in durable plastic case

### Specifications

Mount	Rack (7RU)
Screen Panel	18.5" TFT Active Matrix
HD Compatible	Yes
Anti Glare Coating	Yes
Case	Durable Metal
IR Remote Control	Yes
Native Aspect Ratio	16:9
Visible Screen Size (WH)	16.1" x 9.1" / 409.8 x 230.4mm
Resolution	1366(H) x 768(V)
Brightness Rating	250 cd/m <sup>2</sup> (Nit)
Contrast Ratio	1000:1
Back Light	LED (40K)
Dot Pitch	0.30(H) x 0.30(V)mm
Color Depth	16.7 million
Number of Pixels	1,049,088
Response Time	1.5ms / 3.5ms (Rising/Falling)
Audio Power / Speakers	8 Ohm, 2 Speakers x 2 Watts
Viewing Angle (L/R/T/B)	85/85/80/80 degrees
ATSC/QAM Tuner	x1 F Connector Input
Dimensions	19" x 11.89" x 1.4" / 482.6 x 302 x 36mm
Operating Temp	32 ~ 122°F / 0 ~ 50°C
Power Requirements	12VDC
Power Consumption	<25 Watts; <= 0.5 Watts (Stand-by)
HDMI	x1 Input
VGA	x1 15-pin D-sub Input
Composite	x1 RCA Input
Component	x1 RCA (x3) Input
Audio	x1 RCA L/R Input; x1 3.5mm PC Input; x1 3.5mm Output; x1 Digital Coax Output
USB	x1 Input
Power	x1 2.1mm DC Input
Weight	Net: 8.8 lbs / 4 kg; Gross: 11 lbs / 5 kg