


# HD, &\$\$!

## D`Uh]bi a `GYf]Yg`HD J <: #UHF Antenna

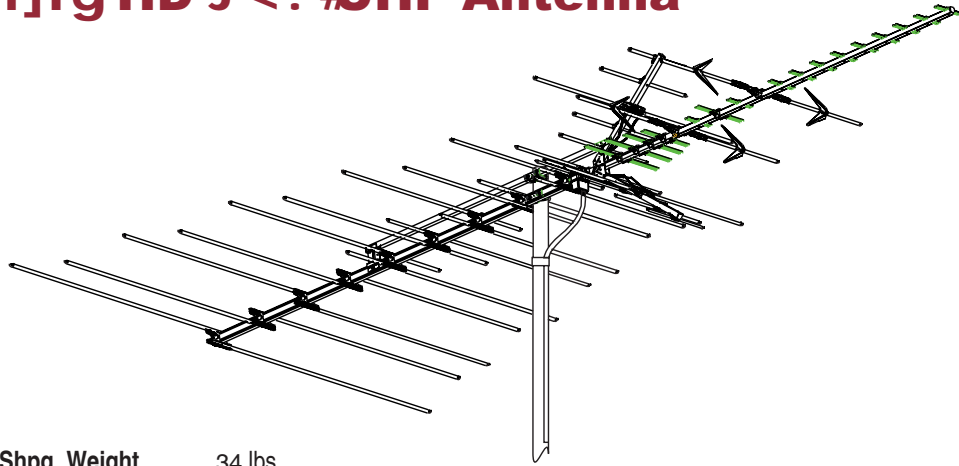

Active Elements 69  
 UHF Elements 35  
 VHF Elements 34  
 Boom Length 168.25"  
 Turning Radius 101"  
 Maximum Width 110"  
 Vertical Height 33"  
 Element Diameter 3/8"

Shpg. Weight 34 lbs.  
 Carton Dimensions 99.5"x 6.5"x 7.75"




"UPS in shield design is a registered trademark of United Parcel Service of America, Inc. used by permission."

Output Impedance: 75 ohm  
 Recommended Preamp: AP Series

Made in U.S.A.

CHANNEL	CH.2	CH.4	CH.6	CH.7	CH.9	CH.11	CH.13	CH.14	CH.32	CH.50	CH.69
dB gain over reference dipole	5dB	6.7dB	6dB	10.4dB	12.6dB	11dB	12dB	14.2dB	13.7dB	12.2dB	13dB
beamwidth at half power points	63°	66°	67°	30°	34°	44°	38°	47°	48°	30°	28°
front-to-back ratio	14dB	greater than 20dB	greater than 20dB	17dB	greater than 20dB	greater than 20dB	18dB	20dB	17dB	20dB	20dB

### POLAR PATTERNS

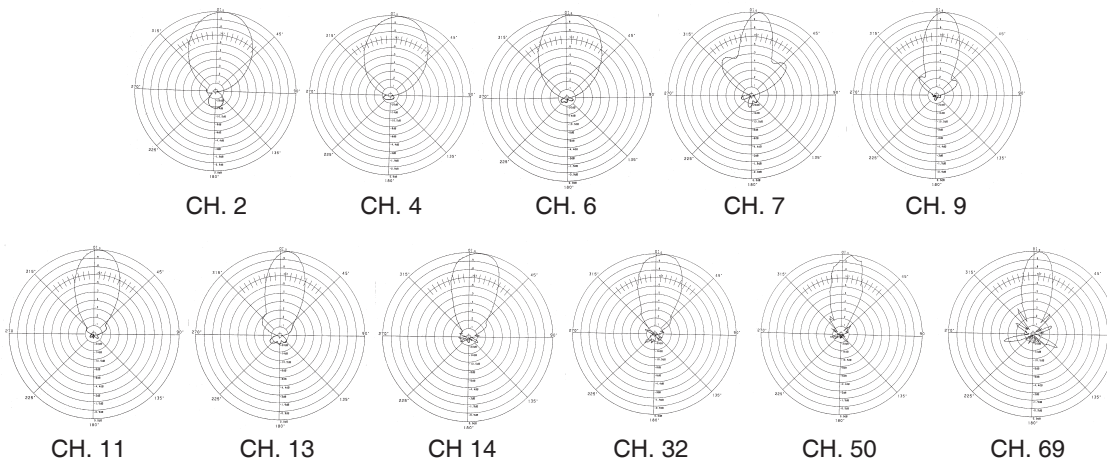

Specifications Subject To Change Without Notice

Rev 6/01

©Toner Cable Equipment, Inc.