

Multiple Outlet Power Strips

These outlet strips will assist you with the power distribution in your headend.

Model #	# Outlets	Length	Power Cord	Switch	Circuit Breaker
OB112	6	12 1/4"	6'	YES	15A
OB160-18	18	60"	6'	NO	15A
OB160-20	20	60"	6'	YES	15A



Blank Panels

Standard 19" Width, ARP Series, 11 Gauge Aluminum, Black Powder Coat Finish

Model	Size
ARP-119-571	1-3/4" (1RU)
ARP-319-571	3-1/2" (2RU)
ARP-519-571	5-1/4" (3RU)
ARP-719-571	7" (4RU)

Larger sizes and colors are available.

HW Series Rack Screw

- Black Truss Head Philips Rack Screws 10-32 x 3/4"
- Pre-Installed Black Nylon Washer to Protect Equipment
- Self Guiding Pilot Point for Ease of Installation

Model HW-100 Bag of 100 Screws

Model HW-500 Jar of 500 Screws




Equipment Support Bracket

Used to support long or heavy equipment in racks and cabinets.

- Model ESB-175 and ESB-350**
- Mounted on Rear Panel
 - Mounting Angle
 - Two Sizes Available 1 3/4" and 3 1/2" High Equipment

Headend Accessories

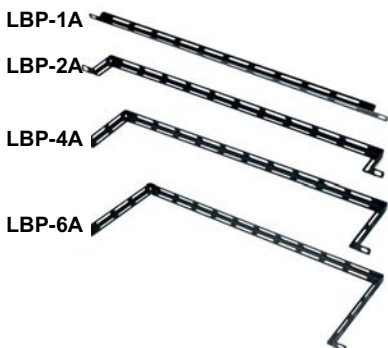

Lacer Bars (Horizontal)

19" black powder coated L shaped steel bars for cable management.

Model	Size
LBP-1A	Straight
LBP-2A	2" Offset
LBP-4A	4" Offset
LBP-6A	6" Offset

UD Series Drawers

Fully enclosed design, rackmountable utility drawers available in 2, 3 and 4 space. Features include face mounted drawer pull, black powder coat finish, and 50 lb. weight capacity.




Model	Size
UD2	15-15/16" W x 14-1/2" D 3-1/2" (2 space)
UD3	15-15/16" W x 14-1/2" D 5-1/4" (3 space)
UD4	15-15/16" W x 14-1/2" D 7" (4 space)

UQFP-4D Ultra Quiet Fan Panel, 4 Fans



- 100 CFM cooling capacity
- Digital processor varies fan speed based on equipment temperature for ultra quiet operation
- Front panel rack temperature and alert display provides instant system status
- Onboard digital processor monitors rack temperature via external sensor
- Local and remote notification of over temperature and fan fault to control system
- Available in 110V and 220V versions

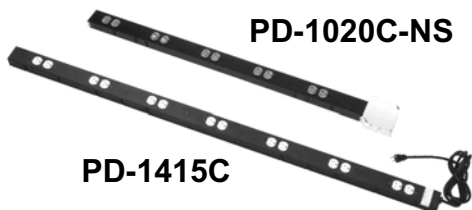

PD-1020C-NS

PD-1415C



PD-915RV-RN
Rackmount Power

- 2 stage surge suppression protects against damage from power surges and spikes
- Provides notification when surge protection is compromised via local LEDs and dry contact
- 9 vertically oriented and circuit-breaker protected 15 amp outlets, 8 rear and 1 front, spaced for plug-in power supplies
- 3 USB style output ports for connection of LED gooseneck work lights, 2 rear and 1 front
- Maximum load of 15 amps

Model	Number of Outlets	Circuits	Nema Outlet Type	Outlets Accomodate	wire Gauge	Circuit Protection	Surge and EMI Filter	UL Standard	NEMA Plug Type
PD-1020C-NS	10 (5 DUPLEX)	(1) 20 AMP	5-20R	5-15P & 5-20P	12	20 AMP CIRCUIT BREAKER	NONE	1363	5-20P
PD-1415C	14 (7 DUPLEX)	(1) 15 AMP	5-15R	5-15P	14	15 AMP CIRCUIT BREAKER	YES	1363 & 1449	5-15P
PD-1415C-NS	14 (7 DUPLEX)	(1) 15 AMP	5-15R	5-15P	14	15 AMP CIRCUIT BREAKER	NONE	1363	5-15P