



Microwave Filter Company, Inc.

* * * + G]b[`Y`7Uj]hm
Hi bUV`Y`BchW `Filters




6367 Series

Model 6367 is easily tuned through its full frequency range. A second control allows adjusting the 3 dB bandwidth over a wide range. The adjustable bandwidth feature of these filters allows suppression of an unwanted carrier with minimum impact on adjacent, desired frequencies.

Cascade It For A Deeper Notch

For spot frequency applications, two or three identical units may be cascaded to produce a notch twice or three times as deep with the similar 3 dB bandwidth. Be sure to complete the model number by inserting the desired bandwidth.

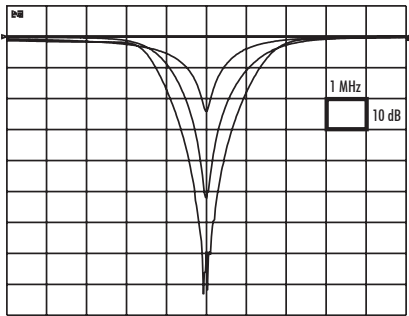

Typical Frequency Response of
F6367-3, FD6367-3, FT6367-3

Model #	50 Ohm Notch Depth (dB)**	75 Ohm Notch Depth (dB)**	Height (L-inches)	Tuning Range** (MHz)
6367-2	23	26	4.500	50-108
**With 3 dB bandwidth adjusted to 3 MHz				

Mechanical Specifications:

Baseplate Dimensions: 2" x 2" (single), 5" x 2" (double), 7" x 2" (triple)
Rack Mount Available Upon Request

Connector Options: 50 ohm-Type N, SMA or BNC
75 ohm-Type F

Ordering Information:

(X)(Y)6367-(Fo)/(BW₃)

(X) - designates the connector type

Connectors: 50 ohm - BNC (B)
SMA (S)
Type N (N)
75 ohm - Type F (F)

(Y) - designates number of cavities

Cavities: (D) Double
(T) Triple

(Fo) - designates the notch frequency (MHz)

(BW₃) - designates the 3 dB bandwidth (MHz)

Note: Orders for double and triple cavity 6367's must specify notch frequency and 3 dB bandwidth.