


5900 Series Two-Way Broadband Indoor Distribution Amplifier

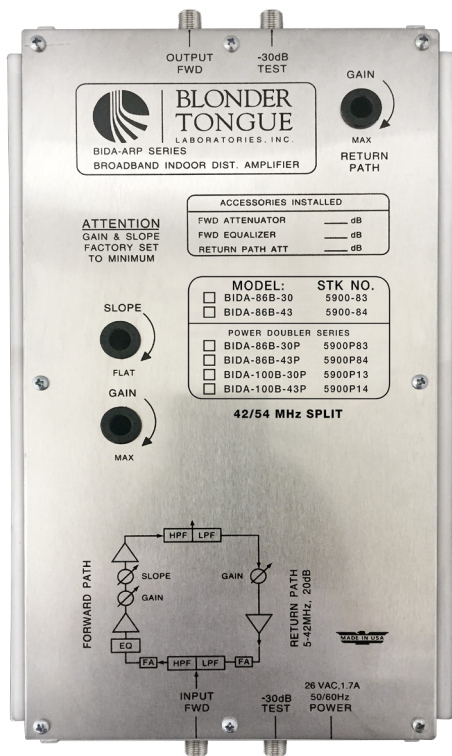

KEY FEATURES

- » Push-Pull and Power-Doubling Hybrid Models Available
- » Hybrid IC Circuitry for High Output with Low Distortion
- » Easily Adjustable Front Panel Gain and Slope Controls
- » Optional Plug-in Fixed Equalizer and Attenuator Capability for Input Signal Conditioning
- » Integrated Return Path Configurable for either Passive or Active Operation
- » Input and Output Test Ports
- » Large Heat Sinks for Exceptional Heat Dissipation

PRODUCT OVERVIEW


The **BIDA 5900 Series** with Active Return Path is a completely self-contained broadband indoor distribution amplifier designed for CATV and SMATV signal distribution systems. Push-Pull and Power-Doubling hybrid amplifier technologies are available for the BIDA 5900 Series with RF bandwidths ranging from 54-860/1000 MHz with 30 or 43 dB gains.

All BIDA 5900 models have a return path bandwidth of 5-42 MHz and can be configured for either a passive (factory default) or integrated active return. When field configured to an active return, the BIDA 5900 Series have a full gain of 20 dB. All models can be attenuated over a range of 10 dB in the forward path and 18 dB in the return path. Gain and slope controls are located on the front panel for easy set-up and adjustment. Two -30 dB back-matched test points are provided to permit testing without interruption of service.

The aluminum chassis is designed to provide excellent heat dissipation thus allowing operation at high ambient temperatures with no degradation of performance or reliability.

5900 Series Two-Way Broadband Indoor Distribution Amplifier

I/O OVERVIEW

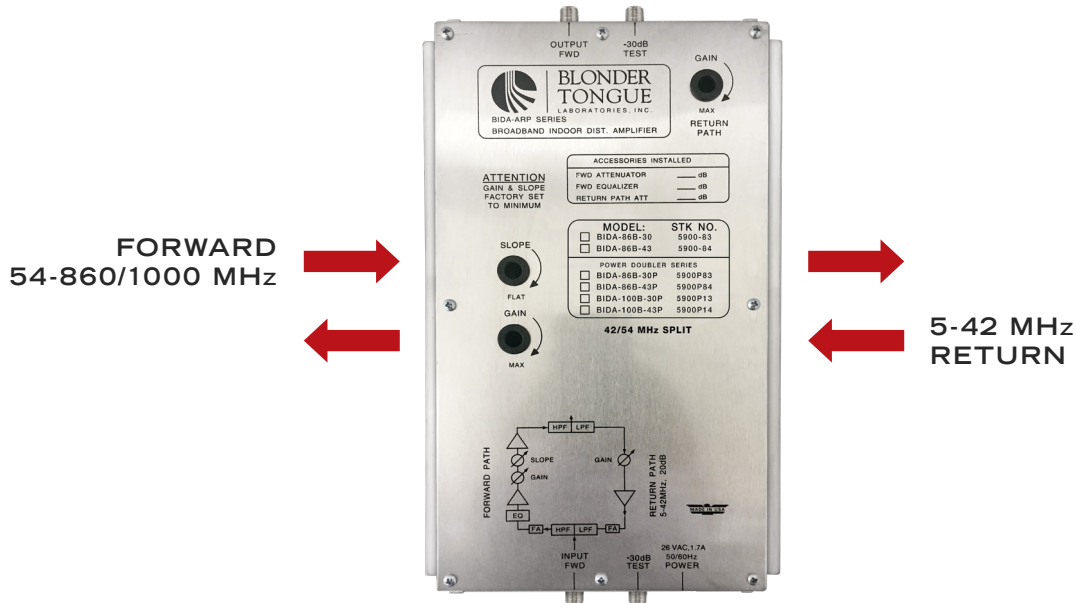

ORDERING INFORMATION



MODEL	STOCK#	DESCRIPTION
BIDA 86B-30	5900 83	Broadband Indoor Distribution Amplifier 30 dB, 54-860 MHz, Push-Pull, Active Return (5-42 MHz)
BIDA 86B-30P	5900P83	Broadband Indoor Distribution Amplifier 30 dB, 54-860 MHz, Power-Doubling, Active Return (5-42 MHz)
BIDA 86B-43	5900 84	Broadband Indoor Distribution Amplifier 44 dB, 54-860 MHz, Push-Pull, Active Return (5-42 MHz)
BIDA 86B-43P	5900P84	Broadband Indoor Distribution Amplifier 44 dB, 54-860 MHz, Power-Doubling, Active Return (5-42 MHz)
BIDA 100B-30P	5900P13	Broadband Indoor Distribution Amplifier 30 dB, 54-1000 MHz, Power-Doubling, Active Return (5-42 MHz)
BIDA 100B-43P	5900P14	Broadband Indoor Distribution Amplifier 43 dB, 54-1000 MHz, Power-Doubling, Active Return (5-42 MHz)

ACCESSORIES		
BIDA-CE-8	5478	BIDA Series Plug-In Cable Equalizer 860 MHz, Values: 3,6,9,12,15,18 dB
BIDA-CE-10	5479	BIDA Series Plug-In Cable Equalizer 1000 MHz, Values: 3,6,9,12,15,18 dB
BIDA-FA	5411A	BIDA Series Plug-In Fixed Attenuator 1000 MHz, Values: 1-20 dB